



Change Screen resolution for Single Board Computer (Odroid-C2)

- Open File Manager (operator's Home icon)
- Goto **/boot** or **devices/boot** folder (which is actually the same)

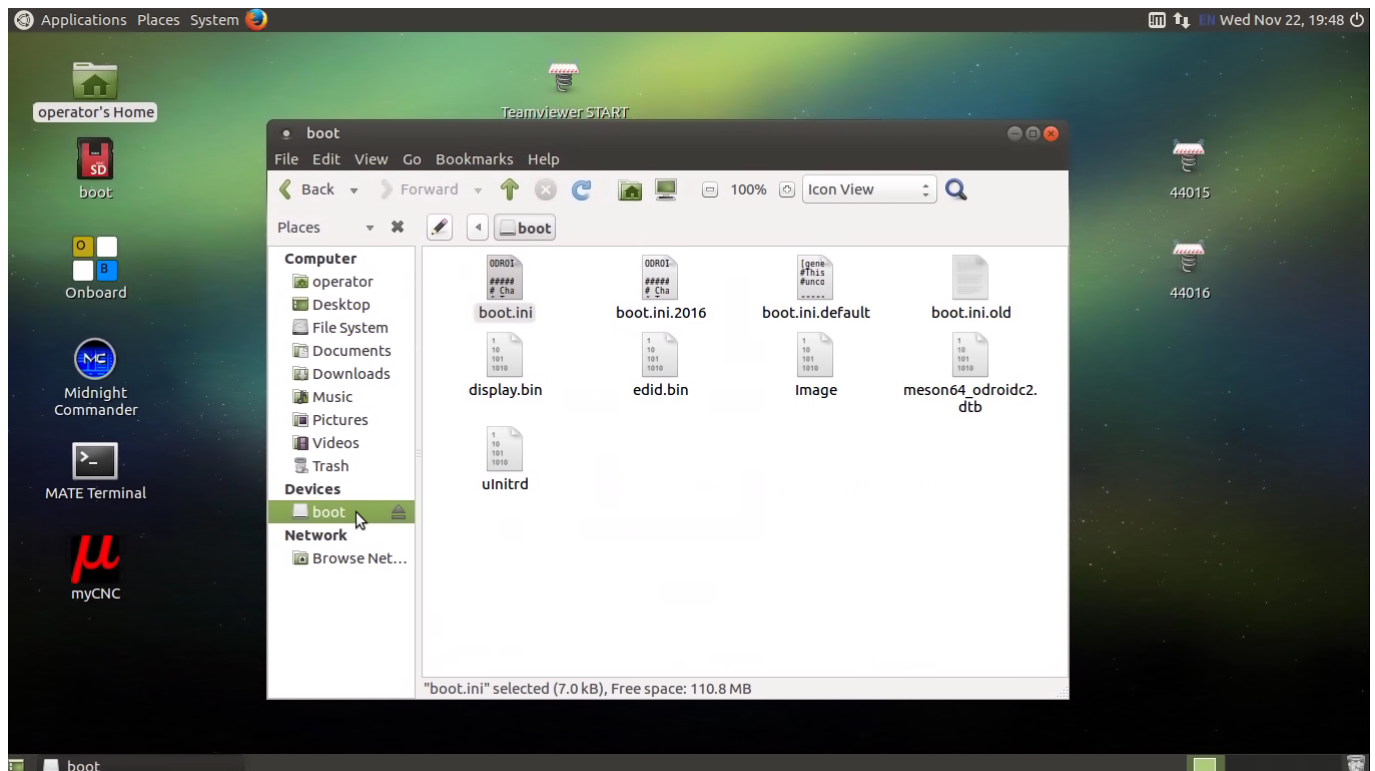


- Select **boot.ini**

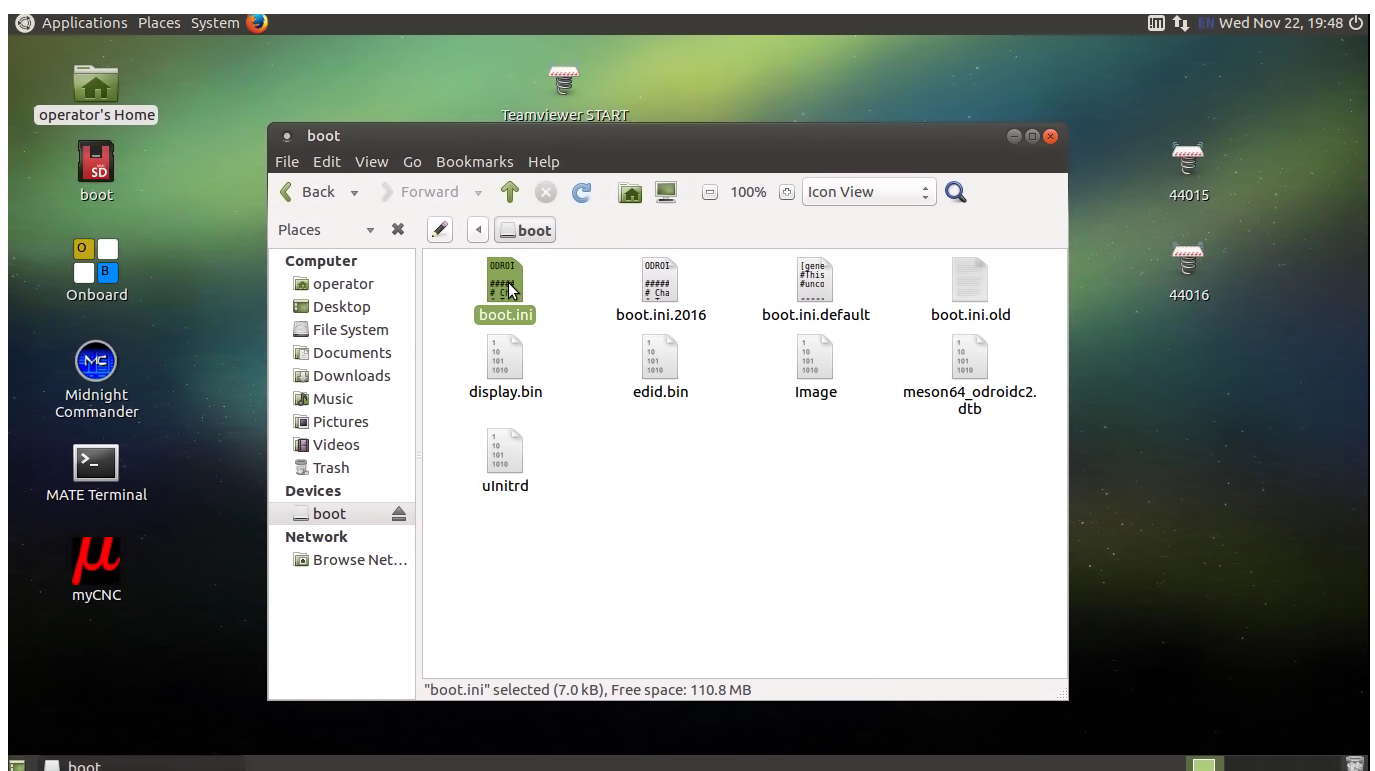



- Press Right mouse button on it and

- Select **Edit as Administrator**

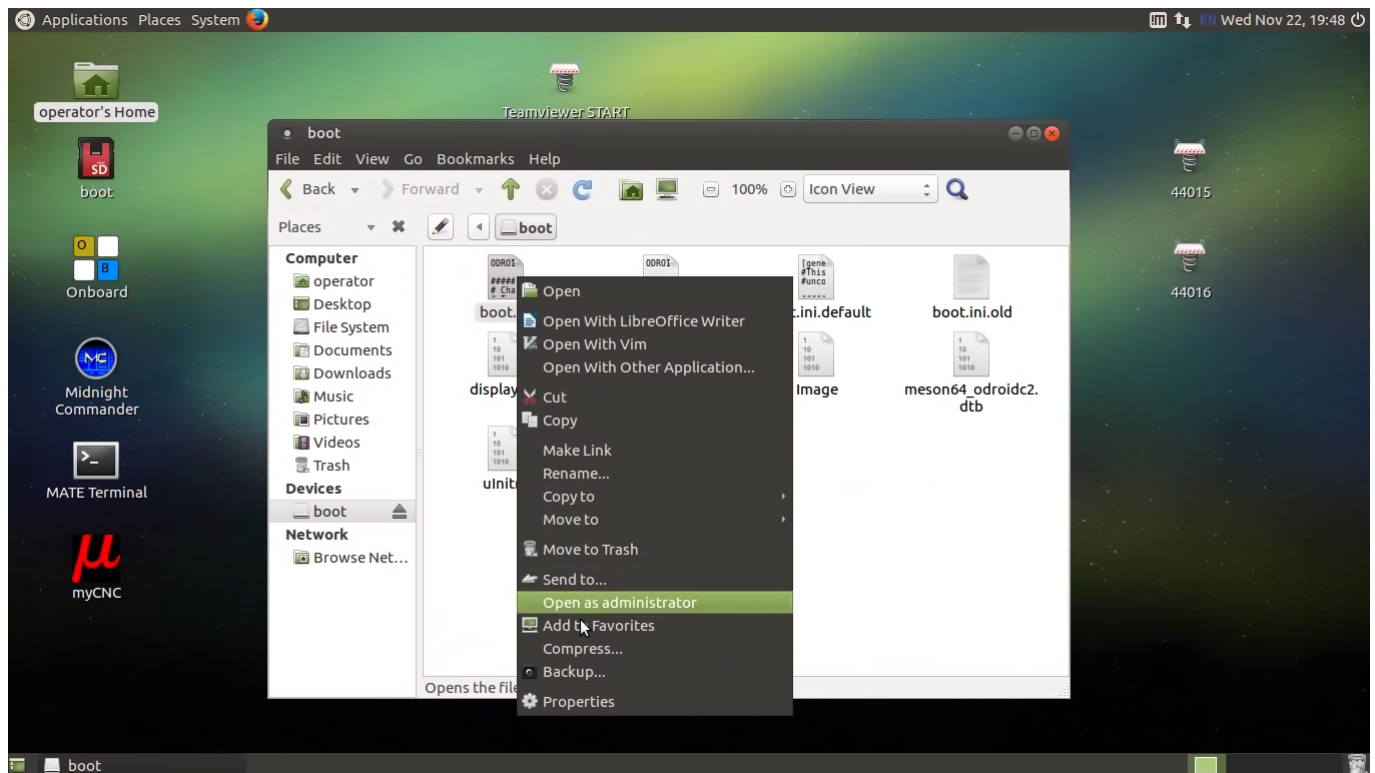

- Comment with symbol “#” current active line with resolution and
- Uncomment (remove symbol “#” from the start) in line with screen resolution you need
- Save changes

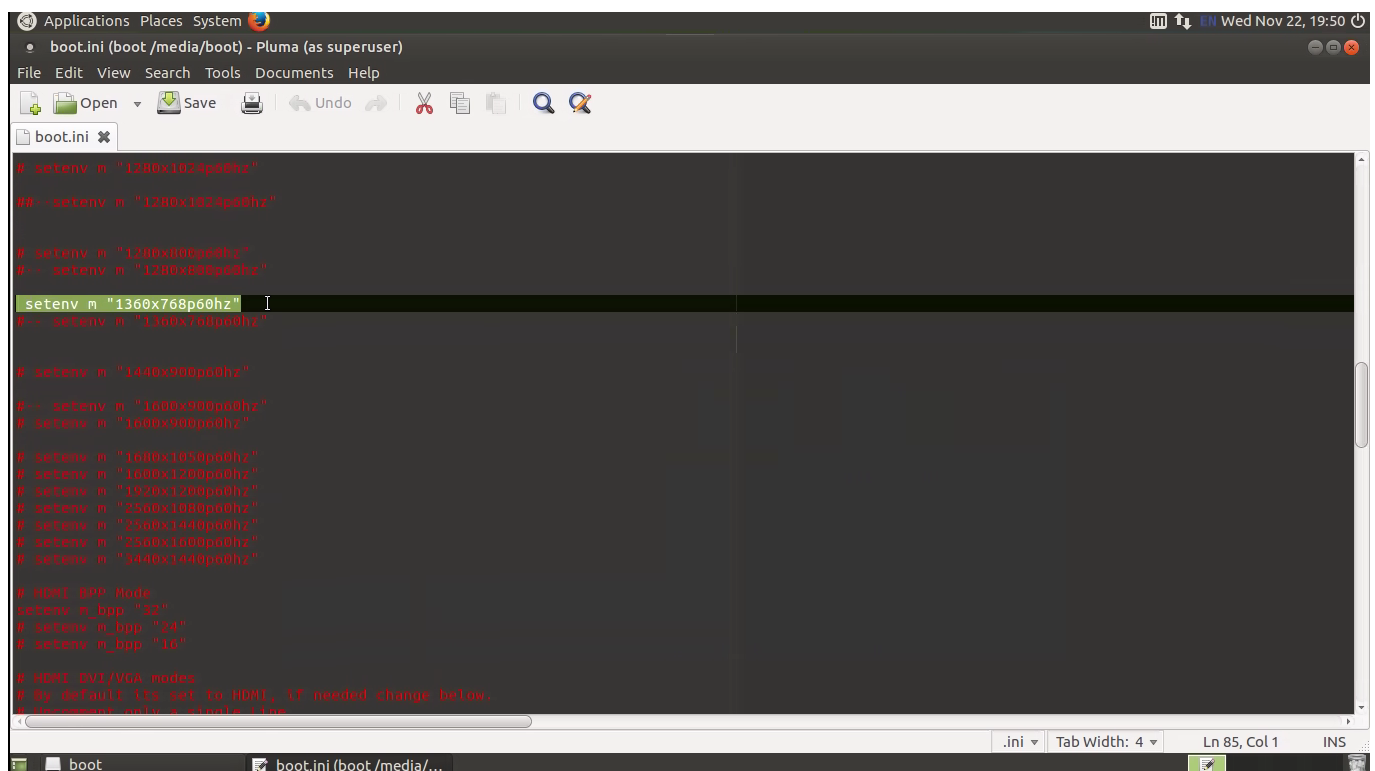

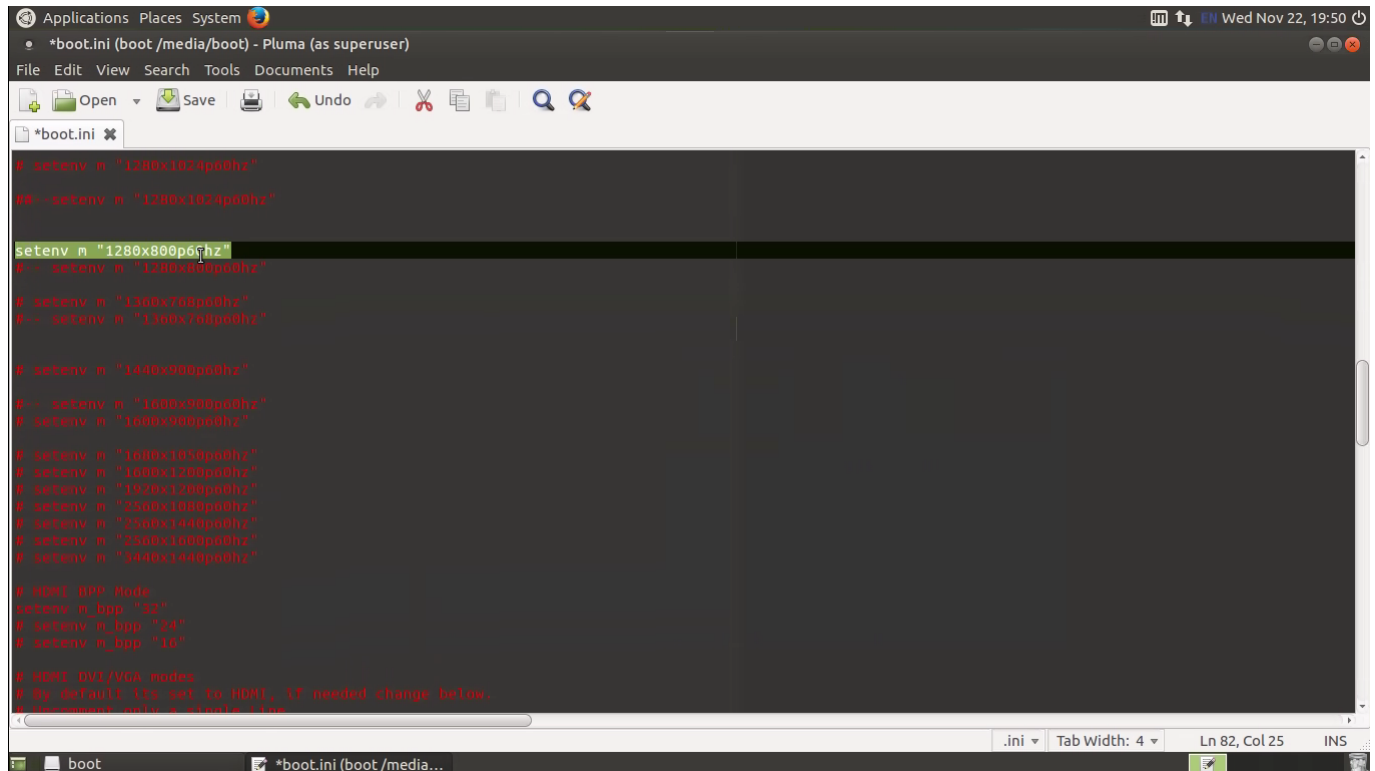

The screenshot shows a terminal window titled '*boot.ini (boot/media/boot) - Pluma (as superuser)'. The window contains the following text:

```
# setenv m "1280x1024p60hz"
#-- setenv m "1280x1024p60hz"

setenv m "1280x800p60hz"
#-- setenv m "1280x800p60hz"

# setenv m "1360x768p60hz"
#-- setenv m "1360x768p60hz"


# setenv m "1440x900p60hz"
#-- setenv m "1600x900p60hz"
# setenv m "1600x900p60hz"


# setenv m "1600x1050p60hz"
# setenv m "1600x1200p60hz"
# setenv m "1920x1200p60hz"
# setenv m "2560x1080p60hz"
# setenv m "2560x1440p60hz"
# setenv m "2560x1600p60hz"
# setenv m "3440x1440p60hz"

# HDMI BPP Mode
setenv m_bpp "32"
# setenv m_bpp "24"
# setenv m_bpp "16"

# HDMI DVI/VGA modes
# By default it's set to HDMI, if needed change below.
# Document only a stable flag
```

The status bar at the bottom indicates the file is *.ini, Tab Width is 4, and the cursor is at Ln 82, Col 25.

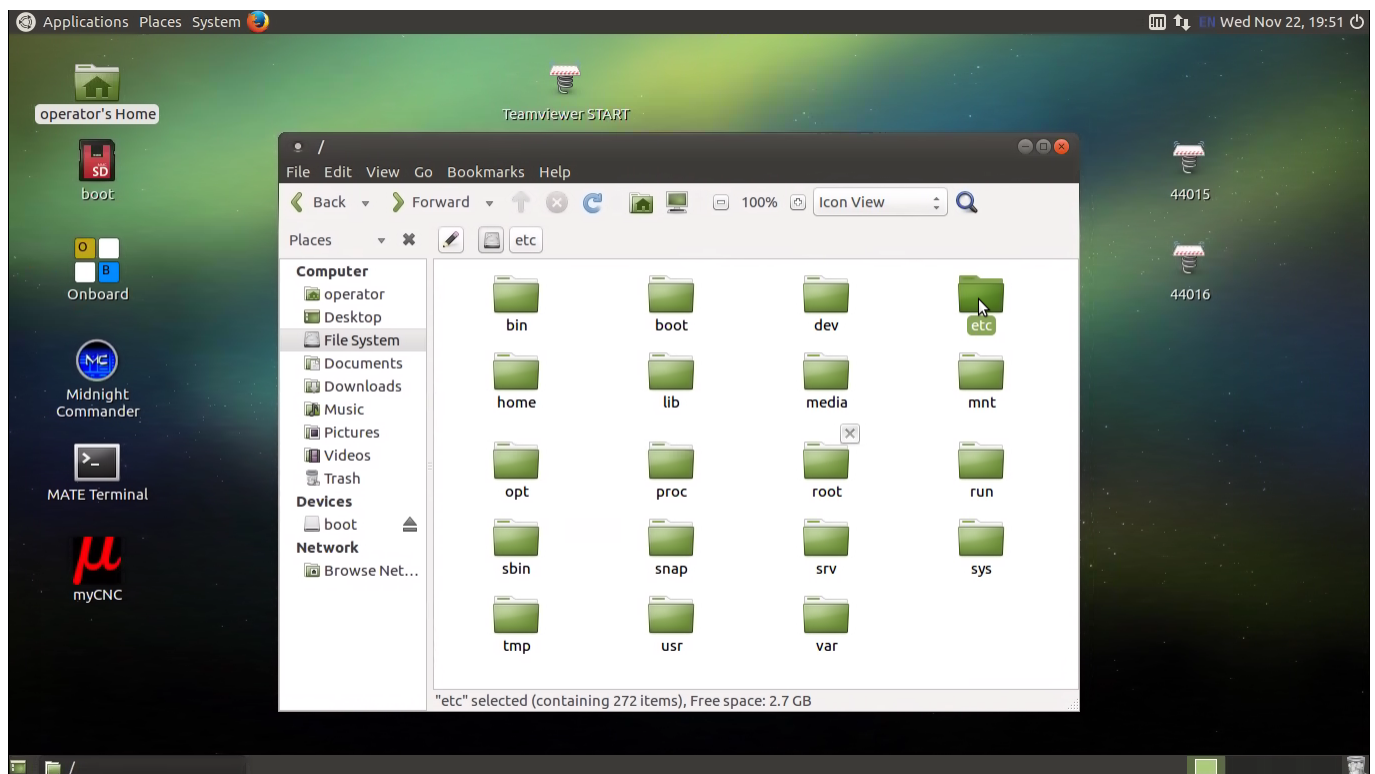

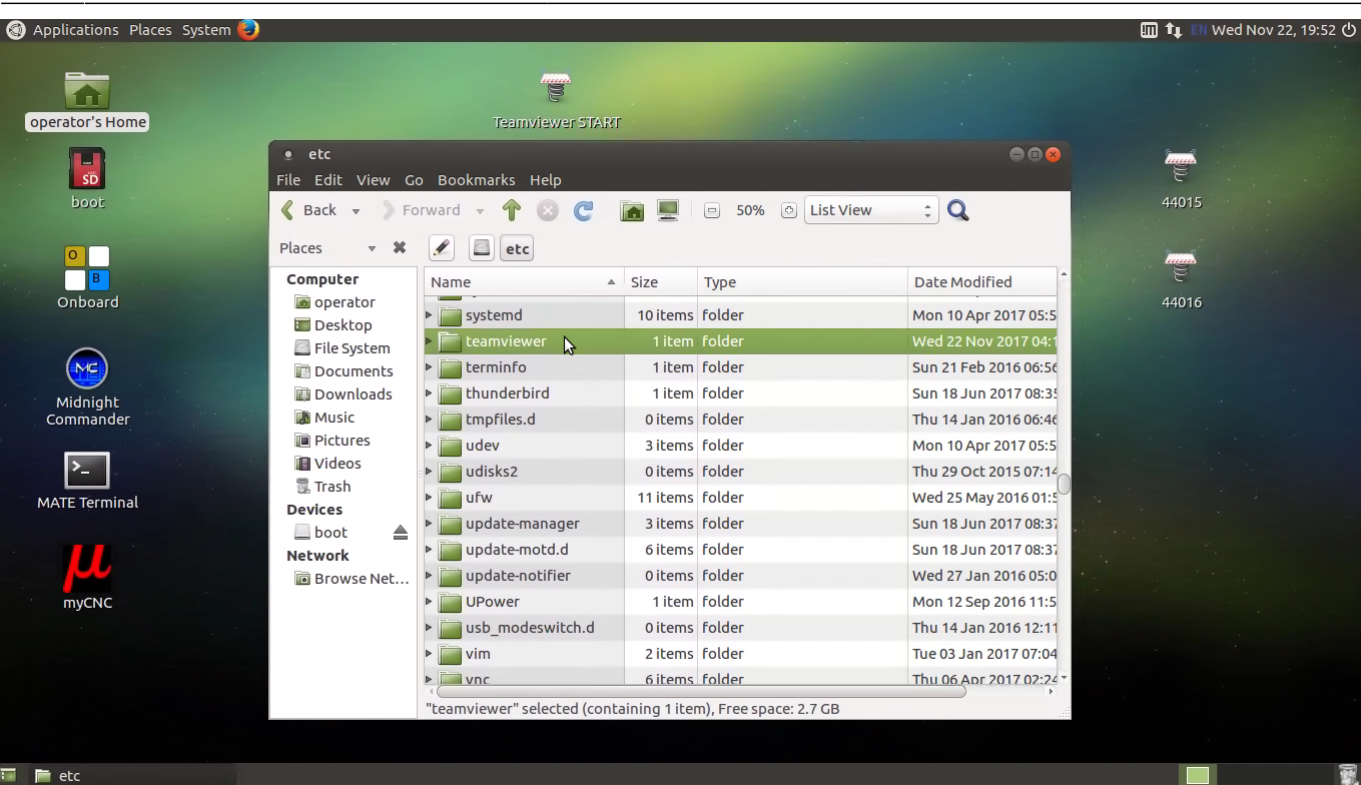

From:
<http://docs.pv-automation.com/> - myCNC Online Documentation

Permanent link:
http://docs.pv-automation.com/mycnc/change_screen_resolution_for_single_board_computer_sbc?rev=1511406824

Last update: 2017/11/22 22:13

