

Tangential knife (Oscillating knife) control in myCNC

NOTE: This article is superceded by the newer manual on tangential cutting control: [Tangential Cutting Setup](#)

myCNC software has built-in features for tangential knife control.

What is Tangential control in myCNC

Tangential knife control activated if the value of “1” is written into Global variable #7005.

In this case, input g-code file is modified automatically to support tangential knife:


1. Positioning blocks (G0-code) is modified. CNC Control software looks at the next motion code, calculates motion direction angle and add C-axis rotation into the G0 code to follow the next motion.
2. For Arc interpolation codes (G2, G3) - CNC control add C-axis rotation to follow motion direction
3. For Linear interpolation (G1 code) - CNC control calculates an angle between two line segments and
 1. If the angle less than **Knife Min Angle**, then C-axis rotation built-in into the G1 line to follow motion direction on smooth curves.
 2. else If the angle less than **Knife Min Angle (2)** , then C-axis rotation is added between the lines and made in the material
 3. else Lift up, C-axis rotation and Move Down is added between the lines to handle sharp corners.

All this control is performed automatically if global variable #7005 is set to “1”.

There are many possible ways to set the variable and have tangential control enabled permanently or switched on-off on-the-fly (for example if switching between Spindle, Marker and tangential nife in G-code program)

How to enable Tangential Control permanently

It's possible to set the variable #7005 by checking a “Knife Enabled” checkbox in “Tangential Knife” configuration widget.

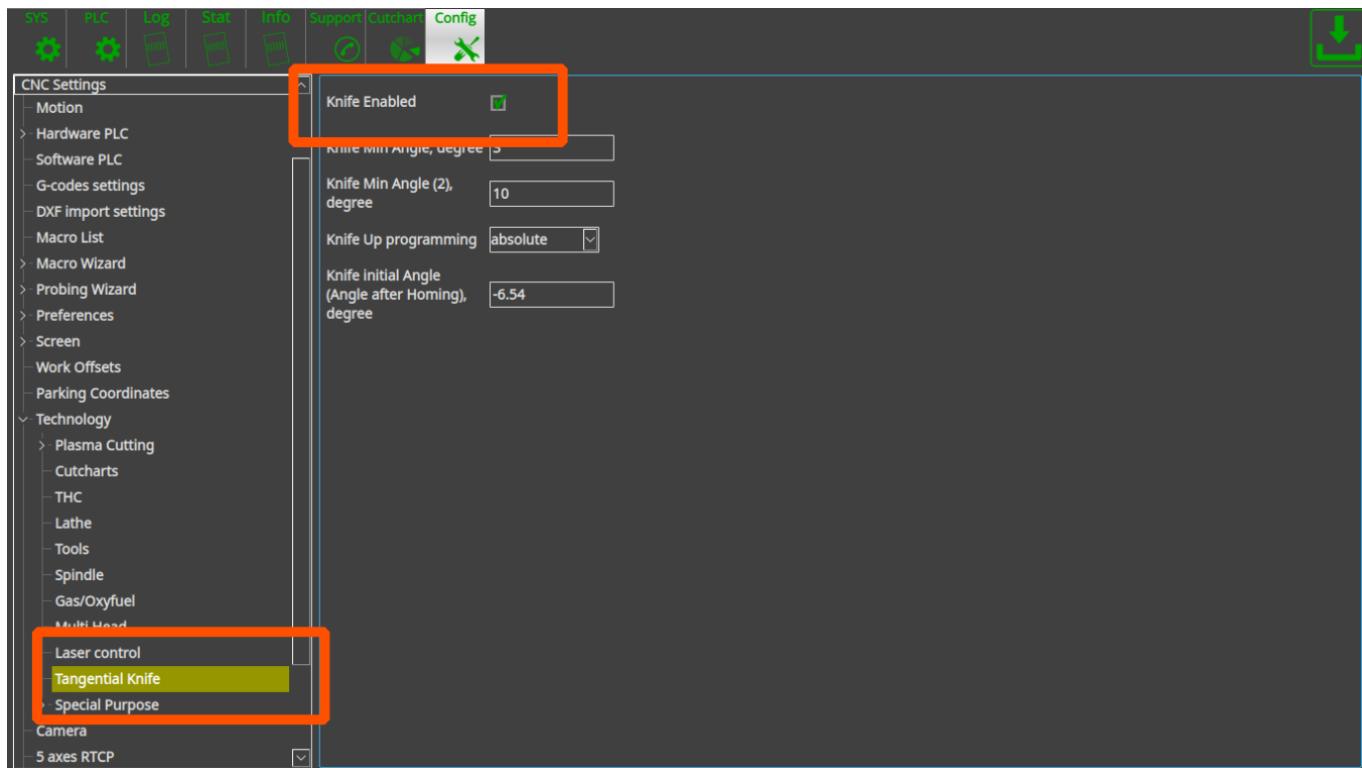

The #7005 variable can be set in Software PLC, "HANDLER_INIT.plc".

Software PLC procedure HANDLER_INIT is running at the start of myCNC control software right after a complete configuration sent to the controller.

It's very easy to add a line to set the variable 7005 -

```
gvarset(7005,1);
```

For example


[_HANDLER_INIT.plc](#)

```
main()
{
    gvarset(60000,1); //run Servo ON procedure
    gvarset(7005,1); //Enable Tangential Knife control
    exit(99);
};
```

myCNC Online Documentation - <http://docs.pv-automation.com/>



Video



From:

<http://docs.pv-automation.com/> - **myCNC Online Documentation**



Permanent link:

http://docs.pv-automation.com/mycnc/tangential_knife_support

Last update: **2023/01/09 11:26**